


# SLIM 512

Wall mounted USB to DMX Stand Alone Device



SLIM stand Alone interface is the best controller for all indoor installations and projects which need an easy and user-friendly lighting control.

It can be easily wall mounted on any surface can fit to Europe and US wall plug standards.

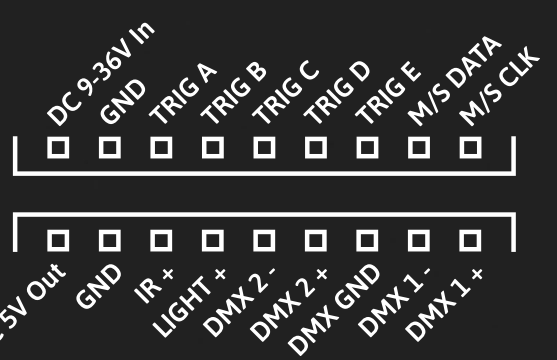

**CHROMATEQ**



## HARDWARE Options

<b>DMX Output</b>	512 In/Out channels PC and Stand Alone, default 2x512 Splitter mode
<b>Zone</b>	1 Zone, play 1 scene/sequence a time in Stand Alone
<b>Memory</b>	Micro SD Card (all FAT format, up to 256 Gb) + Internal memory (No SD card required)
<b>DMX Modes</b>	DMX In/Out (PC), Splitter DMX, merging DMX, DMX record
<b>Stand Alone Options</b>	6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Scene Speed, General dimmer. Time Clock setting adjustable in Stand Alone. 16 bits and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s., Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 32 devices combined and synchronized (64 universes)
<b>Triggers (Stand Alone)</b>	8 buttons with Blue status LED, 10 Pages Real Time Clock and calendar for each scene (hour, Day, Week, Month, Year) Can command the device from the Dry Contacts 5 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority, 32 contacts max) Infrared Remote, Light intensity (with optional deported PCB and remote)
<b>Max DMX outputs (USB)</b>	x12 USB interfaces connected = 12 DMX max
<b>Power</b>	5V DC (USB), 5 to 24V. - 0.2A (screw connector), 0.2W, High Voltage Protection
<b>Dimension</b>	H : 38mm (1.49in) / W : 166mm (6.54in) / D : 97mm (3.82in)
<b>Housing</b>	Black housing with 4 mounting holes, ABS Plastic
<b>I/O Connectors</b>	Mini USB 2.0, Screw Terminal block 2x9 Pins
<b>Operating Temperature</b>	-40 to +85 C°
<b>IP Rating</b>	IP40
<b>Certifications</b>	CE, LVD, RoHS
<b>International Warranty</b>	3 years



## SOFTWARE Options

<b>LED Player</b>	Up to 64x512 DMX Outputs	<b>FREE SOFTWARE</b> Download and Update 
<b>Pro DMX</b>	30 mns Audio and Video Timeline	
<b>Pixxem</b>	Up to 255x512 DMX Outputs	
<b>Studio DMX</b>	3D viewer in real time, Full mode	
<b>Wi-Light APP</b>	Software control (Android, iOS)	
<b>Art-Net Output from PC</b>	2x512 DMX Outputs per connected device	
<b>System Compatibility</b>	Windows, iOS, Linux	
<b>Technical support</b>	Worldwide, English, French, Chinese	

Contact, support, download  
from [www.chromateq.com](http://www.chromateq.com)

**PC minimum configuration:**  
 Windows / Mac OS / Linux(Device)  
 2Ghz CPU, 8 Gb RAM  
 2Gb RAM graphic card  
 500 Mb disk  
 1 USB port (Device)  
 1 Ethernet port (ART-Net out/CQSA-E)

