

NDP60 WM

NDP series

Wall-mount


Network Dimmer

The **network dimmer pack NDP60 WM** is designed to fulfill all the top requirements of the most demanding lighting applications e.g. **theatres**, live concerts and also permanent installations. Unit was especially created for users requiring maximum flexibility, top class features and superb network connections.

Unit is controlled by a high speed processor with smooth **16-bit dimming** resolution via specially designed zero-crossing circuit. This technology guarantees trouble-free operation and high proof against the influence of negative surroundings with top class **rise-time of 400us**.

Moreover, the **network dimmer pack NDP60 WM** comes with **NDP-DC+RELAY** feature that is a **DC DRIVE/RELAY switch with rating of 16A and possibility to turn on/off via curve**. (DC-RELAY is not available for NDP dimmers 25 and 32A).

All NDPseries dimming units are covered by a 5-year warranty.

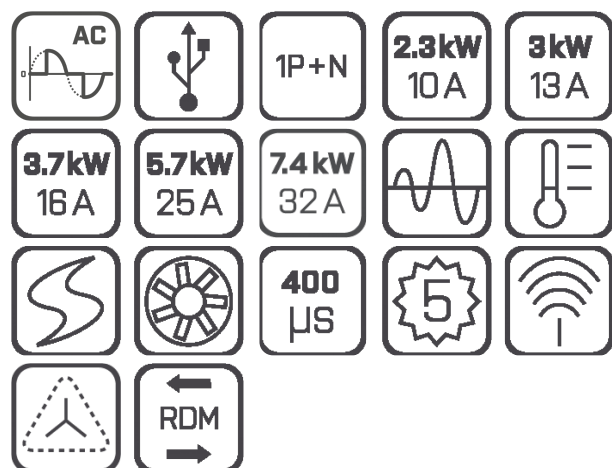

Main voltage: **3x230V / 400V / 40-65Hz**

Main current: **3x20 up to 3x63A**

Protection: **General Electric 1P / 1P+N / 1P+1P**

- **DCdrive/pulse** driving of triacs
- **RELAY/DIMMER** on single channel - depends on curve
- **Theater** or touring application
- **Rise-time of 400us**
- **Main switch / GFI 30mA** per unit
- **MCB or RCBO** per channel
- Double **DMX input + RDM support**
- **Ethernet connection / Art-Net / SRS.net / sACN**
- Software patch of **Manual / DMX A / DMX B / Ethernet**
- **Preheat** for all or a separate channel
- **Free monitoring software**
- **100% duty cycle**

Dimensions: **483 x 460 x 132mm (WxHxD)**

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o



SRS Group s.r.o.

Rybničná 36/D, 831 07 Bratislava, Slovakia

phone: [+421 232 661 800](tel:+421232661800), email: sales@srs-group.com, www.srs-group.com

Variants

1P protection

- 932039 NDP6010B-5 WM 6x10A / 2.3kW, main switch
- 932053 NDP6010-5 WM 6x10A / 2.3kW, GFI
- 932040 NDP6013B-5 WM 6x13A / 3kW, main switch
- 932052 NDP6013-5 WM 6x13A / 3kW, GFI
- 932041 NDP6016B-5 WM 6x16A / 3.7kW, main switch
- 932051 NDP6016-5 WM 6x16A / 3.7kW, GFI
- 932028 NDP6025B-5 WM 6x25A / 5.7kW, main switch
- 932027 NDP6025-5 WM 6x25A / 5.7kW, GFI
- 932033 NDP6032B-5 WM 6x32A / 7.4kW, main switch
- 932032 NDP6032-5 WM 6x32A / 7.4kW, GFI

1P+N protection

- 932054 NDPN6010-5 WM 6x10A / 2.3kW, 1P+N, GFI
- 932055 NDPN6013-5 WM 6x13A / 3kW, 1P+N, GFI
- 932056 NDPN6016-5 WM 6x16A / 3.7kW, 1P+N, GFI
- 932057 NDPN6025-5 WM 6x25A / 5.7kW, 1P+N, GFI

DDP/NDP output



K0: 6x PG21



K1: 1x HARTING 24 (PH:1-12, N:13-24)



K2: 2x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)



K3: 2x Socapex 19



K4: 12x French Schuko



K5: 12x Schuko



K7: 12x Danish socket



K8: 12x Swiss Socket Type23



K9: 4x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)



K10: 2x HARTING 16 (PH:1,3,..., N:2,4,..., NC:13-16)



K11: 2x HARTING 6



K12: 2x HARTING 6 (PH, N - in round)



K13: 12x CEE16/3p



K14: 6x CEE32/3p



K15 - 6x PowerCon 32A



K16 - 2x Harting 6 / 25A



K23 - DDP/NDP output 4xSX

3PH-IN connector



32A 5-pin



63A 5-pin

3PH-IN cable options



2,0m cable, open end

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o